


TECHNICAL FEATURES

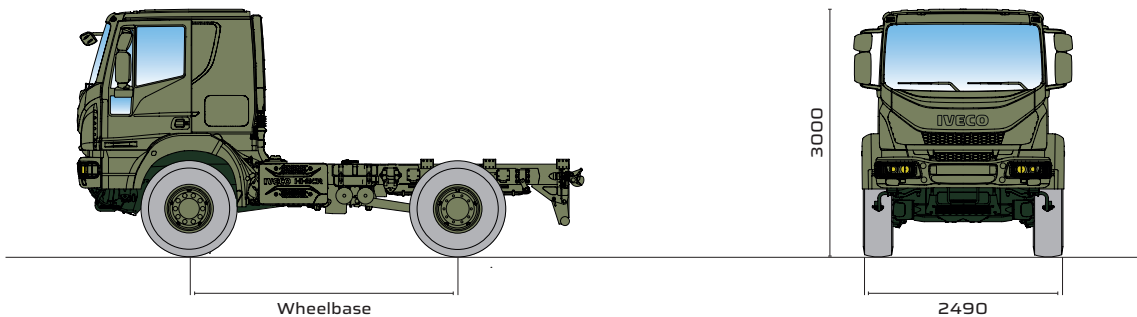

EUROCARGO - OFF-ROAD 4X4

MODEL	GVW (kg)	MAX. GVW (kg)	VERSION			CABS			ENGINES (hp)				TRANSMISSION			SUSPENSION		WHEELBASES (MM)
			Std	R (towing)	K (tipper)	Day	Sleeper	Crew	Tector 7				Manual		Automatic	Parabolic	Reinforced	
									220	250	280	320	6	6+PTO	5			
110E 120E	11500	21000	•	•	•	•	•		•	•			•	•	•	•	•	3240-3690-3915-4150
150E	15000	24000	•	•	•	•	•		•	•			•	•	•	•	•	3240-3690-3915-4150

EUROCARGO - OFF-ROAD 4X4 MOBILITY

MODEL	TWIN WHEELS 10R22.5				SINGLE WHEELS 365/80R20				TWIN WHEELS 11R22.5				SINGLE WHEELS 395/85R20				SINGLE WHEELS 14R20			
Wheelbase (mm)	3240	3690	3915	4150	3240	3690	3915	4150	3240	3690	3915	4150	3240	3690	3915	4150	3240	3690	3915	4150
Hump angle (°)	21	19	18	18	22	20	19	19	21	19	18	18	22	22	21	21	23	23	22	22
Departure angle (°)	15	15	15	11	17	17	17	12	16	16	16	11	16	16	16	12	17	17	17	13
Approach angle (°)	28				29				28				31				32			
Ground clearance	321				351				333				392				428			
Lateral gradient (°)	30				28				30				28				26			
Maximum climbable gradient ON ROAD	41%				38%				38%				33%				31%			
Maximum climbable gradient OFF ROAD	>100%				>100%				>100%				>80%				>74%			
Wading depth up to (mm)	473				501				489				542				578			

EUROCARGO - 4X2

MODEL	GVW (kg)	MAX. GVW (kg)	VERSION			CABS			ENGINES (hp)							TRANSMISSION				SUSPENSION			WHEELBASES (MM)
			Std	R (towing)	K (tipper)	Day	Sleeper	Crew	Tector 5			Tector 7				Manual		Auto-mated	Automatic	Mechanical	Pneumatic rear	Full pneumatic	
									160	190	210	220	250	280	320	6	9	6	5				
60	6200		•		•	•	•		•							•		•		•			3105-3330-3690 4185-4455-4815
65	7000		•		•	•	•		•								•		•		•		
75	7500	16500	•	•	•	•	•		•	•	•					•		•		•			2790-3105-3330-3690 4185-4455-4815
80L	8000		•	•	•	•	•		•	•	•						•		•		•		
80	8000	18000	•	•	•	•	•	•		•	•	•				•	•	•	•	•	•	•	2790-3105-3330-3690 4185-4455-4815
90	9000		•	•	•	•	•	•		•	•	•					•	•	•	•	•	•	2790-3105-3330-3690 4185-4455-4815
100	10000		•	•	•	•	•	•		•	•	•					•	•	•	•	•	•	2790-3105-3330-3690 4185-4455-4815
110L	11000	18000	•	•		•	•		•	•	•					•	•	•	•	•	•		3105-3330-3690 4185-4455-4815
120L	12000		•	•		•	•	•		•	•	•					•	•	•	•	•		3105-3330-3690 4185-4455-4815
120	12000	26000	•	•	•	•	•	•		•	•	•	•	•		•	•	•	•	•	•	•	3105-3690-4185-4455-4815-5175-5670-6570
140	14000		•	•	•	•	•	•		•	•	•	•	•		•	•	•	•	•	•	•	3105-3690-4185-4455-4815-5175-5670-6570
150	15000	35000	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	3105-3690-4185-4455-4815-5175-5670-6570
160	16000		•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•		3105-3690-4185-4455-4815-5175-5670-6570
180	18000	35000	•	•	•	•	•					•	•	•	•	•	•	•	•	•	•		3690-4185-4590-4815-5175-5670-6210-6570
190L	19000		•	•		•	•					•	•	•	•	•	•	•	•	•	•		3690-4185-4590-4815-5175-5670-6210-6570

The data contained in this brochure is purely indicative and IDV reserves the right to modify or to upgrade design details without notice in accordance with future technical developments.